

SERPICO



N A S C O

## OUR SERPICO COLLECTION

is our most versatile collection to date. With 7 colors, 10 sizes, and 3 finishes to choose from, it gives a designer the ability to specify it in any application or space.

One of the available finishes is called “Relief” which is a unique ribbed, striated finish geared to provide some grip and a beautifully aesthetic look versus a standard textured finish.



Serpico Mid Grey



Serpico Night

# TILES



**Charcoal**

4" x 4"  
12" x 24"  
24" x 24"


12" x 12"  
12" x 48"



**Cool Grey**

4" x 4"  
12" x 24"  
24" x 24"


12" x 12"  
12" x 48"

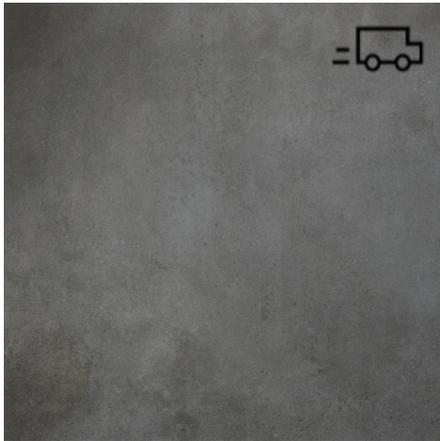

**Mid Grey**

4" x 4"  
12" x 24"  
24" x 24"


12" x 12"  
12" x 48"

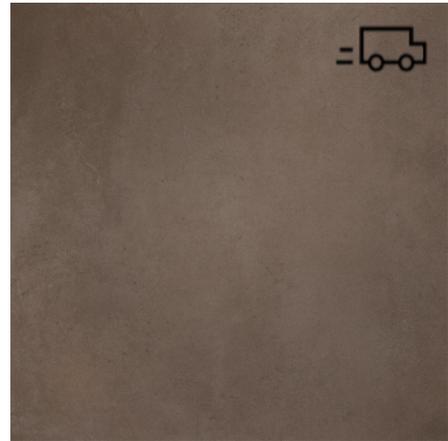

**Copper**

4" x 4"  
12" x 24"  
24" x 24"

12" x 12"  
12" x 48"

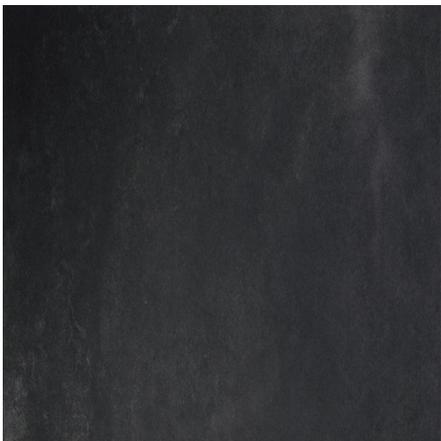

**Night**

4" x 4"  
12" x 24"  
24" x 24"

12" x 12"  
12" x 48"



**Off White**

4" x 4"  
12" x 24"


12" x 12"  
24" x 24"



**Sand**

4" x 4"  
12" x 24"  
24" x 24"

12" x 12"  
12" x 48"



Quickship Available



Serpico Night


# RELIEF TEXTURED FINISH



**Charcoal Relief**

4" x 4"  
12" x 24"


12" x 12"  
12" x 48"

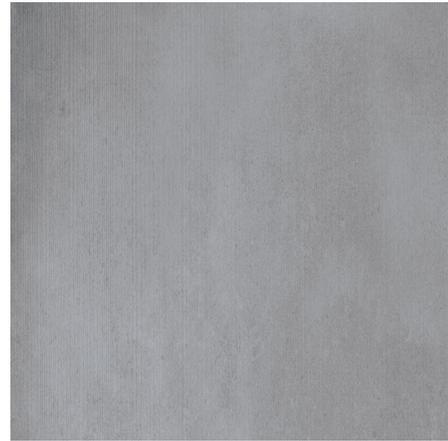

**Cool Grey Relief**

4" x 4"  
12" x 24"  
24" x 24"


12" x 12"  
12" x 48"

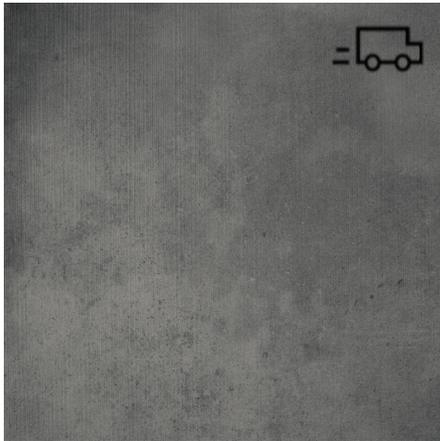

**Mid Grey Relief**

4" x 4"  
12" x 24"  
24" x 24"

12" x 12"  
12" x 48"

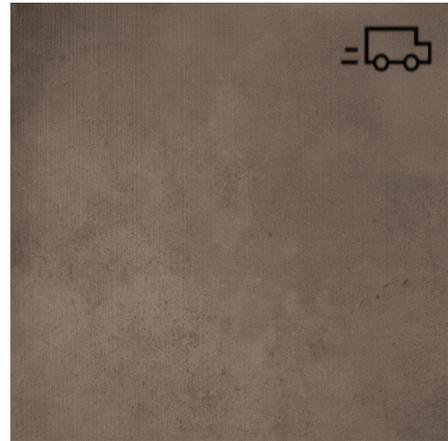

**Copper**

4" x 4"  
12" x 24"  
24" x 24"

12" x 12"  
12" x 48"



**Night Relief**

4" x 4"  
12" x 24"  
24" x 24"

12" x 12"  
12" x 48"



**Off White Relief**


4" x 4"  
12" x 12"  
12" x 24"



**Sand Relief**

4" x 4"  
12" x 24"  
24" x 24"

12" x 12"  
12" x 48"




Quickship Available



Serpico Mid Grey

# MOSAICS

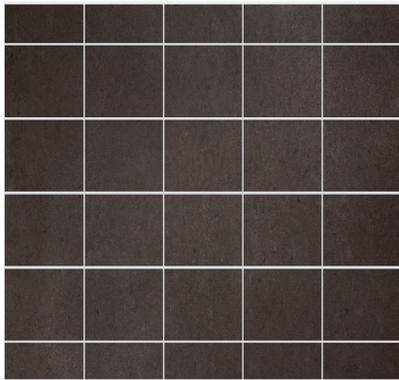

**Charcoal Mosaic**

1" x 1" on 12" x 12" Mesh  
1" x 2" on 12" x 12" Mesh



**Cool Grey Mosaic**

1" x 1" on 12" x 12" Mesh  
1" x 2" on 12" x 12" Mesh




**Cool Mid Grey Mosaic**

1" x 1" on 12" x 12" Mesh  
1" x 2" on 12" x 12" Mesh



**Copper Mosaic**

1" x 1" on 12" x 12" Mesh  
1" x 2" on 12" x 12" Mesh

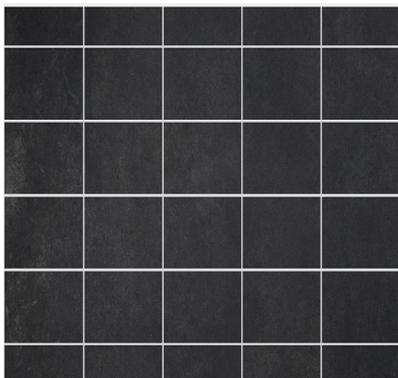


**Night Mosaic**

1" x 1" on 12" x 12" Mesh  
1" x 2" on 12" x 12" Mesh



**Off White Mosaic**

1" x 1" on 12" x 12" Mesh  
1" x 2" on 12" x 12" Mesh

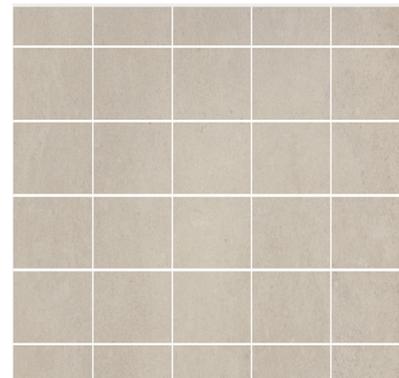

**Sand Mosaic**

1" x 1" on 12" x 12" Mesh  
1" x 2" on 12" x 12" Mesh



Serpico Mid Grey

Serpico Mid Grey



Serpico Night

MODEL	SERPICO
NOMINAL SIZE	30 x 60 (rectified)
THICKNESS	9,5 mm
PRODUCT	Gres Porcellanato Tiles
SURFACE	Glazed, lapato
GROUP	B1a
REF. STANDARD	ISO 13006 / EN 14411

TEST DESCRIPTION	STANDARD TEST METHOD	STANDARD REQUIREMENTS	NASCO SPECIFICATION
Surface Quality	BS EN ISO 10545-2	min. 95% of tiles free from visible defects	min. 95% of tiles free from visible defects
Length & Width	BS EN ISO 10545-2	± 0.6 %	± 0.2 %
Thickness	BS EN ISO 10545-2	± 5.0 %	± 5.0 %
Straightness of Sides	BS EN ISO 10545-2	± 0.5 %	± 0.25 %
Rectangularity	BS EN ISO 10545-2	± 0.5 %	± 0.25 %
Surface Flatness: Center Curvature	BS EN ISO 10545-2	± 0.5 %	± 0.3 %
Surface Flatness: Edge Curvature	BS EN ISO 10545-2	± 0.5 %	± 0.3 %
Surface Flatness: Warpage	BS EN ISO 10545-2	± 0.5 %	± 0.3 %
Water Absorption	BS EN ISO 10545-3	≤ 0.5 %	≤ 0.4 %
Breaking Strength	BS EN ISO 10545-4	≥ 1300 N	≥ 2200 N
Modulus of Rupture	BS EN ISO 10545-4	≥ 35 N/mm <sup>2</sup>	≥ 40 N/mm <sup>2</sup>
Resistance to Surface Abrasion	BS EN ISO 10545-7	Stated by manufacturer	PEI Class 4
Coefficient of Linear Thermal Expansion	BS EN ISO 10545-8	Test method available	≤ 7 X 10 <sup>-6</sup> /°C
Resistance to Thermal Shock	BS EN ISO 10545-9	Test method available	No visible defect
Crazing Resistance	BS EN ISO 10545-11	Required	No crazing
Frost Resistance	BS EN ISO 10545-12	Required	No visible damage
Resistance to household chemicals & swimming pool salts	BS EN ISO 10545-13	Minimum Class GB	Class GA No visible effect
Resistance to low concentrations of acids and alkalis	BS EN ISO 10545-13	Stated by manufacturer	Class GLA No visible effect
Resistance to Stains	BS EN ISO 10545-14	Minimum Class 3	Min. Class 4 Stains removed
Shade Variation	ANSI A137.1-2012	-	V3
Static Coefficient of Friction (dry)	ASTM C1028	Test method available	> 0,6
Static Coefficient of Friction (wet)	ASTM C1028	Test method available	> 0,6
Slip Resistance (ramp test)	DIN 51130	-	R 10

# SIZES


## TILES

Height	Width	Thickness	Nominal
4"	4"	3/8"	Yes
12"	12"	3/8"	Yes
12"	24"	3/8"	Yes
24"	24"	3/8"	Yes
12"	48"	3/8"	Yes

## MOSAICS

Height	Width	Thickness	Nominal
1"	2"	3/8"	Yes

## TRIMS



3' x 24'  
Bullnose Base

## FINISHES



Semi Polished



Matte



Textured

\*MOSAICS ONLY AVAILABLE IN MATTE\*

## ORDER NOTE

All sizes are nominal and in inches. Special cut sizes and additional trim pieces are available upon meeting a required minimum order quantity.

Charcoal is not available in 24" x 24" Relief.

Off White is not available in 24" x 24" Relief and in 12" x 48" of all finishes.

Relief is suitable for exterior applications.

All mosaics are available in corresponding field tiles.

INTERIORS	EXTERIORS	WALLS
WET	APPLICATIONS	
FLOORS	FACADE	HIGH-TRAFFIC



DCOF .42 – PASS  
HONED + BRUSHED FINISH



MODEL	SERPICO
NOMINAL SIZE	30 x 60 (rectified)
THICKNESS	9,5 mm
PRODUCT	Gres Porcellanato Tiles
SURFACE	Glazed, lapato
GROUP	B1a
REF. STANDARD	ISO 13006 / EN 14411

TEST DESCRIPTION	STANDARD TEST METHOD	STANDARD REQUIREMENTS	NASCO SPECIFICATION
Surface Quality	BS EN ISO 10545-2	min. 95% of tiles free from visible defects	min. 95% of tiles free from visible defects
Length & Width	BS EN ISO 10545-2	± 0.6 %	± 0.2 %
Thickness	BS EN ISO 10545-2	± 5.0 %	± 5.0 %
Straightness of Sides	BS EN ISO 10545-2	± 0.5 %	± 0.25 %
Rectangularity	BS EN ISO 10545-2	± 0.5 %	± 0.25 %
Surface Flatness: Center Curvature	BS EN ISO 10545-2	± 0.5 %	± 0.3 %
Surface Flatness: Edge Curvature	BS EN ISO 10545-2	± 0.5 %	± 0.3 %
Surface Flatness: Warpage	BS EN ISO 10545-2	± 0.5 %	± 0.3 %
Water Absorption	BS EN ISO 10545-3	≤ 0.5 %	≤ 0.4 %
Breaking Strength	BS EN ISO 10545-4	≥ 1300 N	≥ 2200 N
Modulus of Rupture	BS EN ISO 10545-4	≥ 35 N/mm <sup>2</sup>	≥ 40 N/mm <sup>2</sup>
Resistance to Surface Abrasion	BS EN ISO 10545-7	Stated by manufacturer	PEI Class 4
Coefficient of Linear Thermal Expansion	BS EN ISO 10545-8	Test method available	≤ 7 X 10 <sup>-6</sup> /°C
Resistance to Thermal Shock	BS EN ISO 10545-9	Test method available	No visible defect
Crazing Resistance	BS EN ISO 10545-11	Required	No crazing
Frost Resistance	BS EN ISO 10545-12	Required	No visible damage
Resistance to household chemicals & swimming pool salts	BS EN ISO 10545-13	Minimum Class GB	Class GA No visible effect
Resistance to low concentrations of acids and alkalis	BS EN ISO 10545-13	Stated by manufacturer	Class GLA No visible effect
Resistance to Stains	BS EN ISO 10545-14	Minimum Class 3	Min. Class 4 Stains removed
Shade Variation	ANSI A137.1-2012	-	V3
Static Coefficient of Friction (dry)	ASTM C1028	Test method available	> 0,6
Static Coefficient of Friction (wet)	ASTM C1028	Test method available	> 0,6
Slip Resistance (ramp test)	DIN 51130	-	R 10

# SIZES


## TILES

Height	Width	Thickness	Nominal
4"	4"	3/8"	Yes
12"	24"	3/8"	Yes
24"	24"	3/8"	Yes

## MOSAICS

Height	Width	Thickness	Nominal
1"	1"	3/8"	Yes
1"	2"	3/8"	Yes

## TRIMS



12" x 24"  
12" x 48"  
Bullnose Base

## FINISHES



Semi Polished



Matte



Textured

\*MOSAICS ONLY AVAILABLE IN MATTE\*

## ORDER NOTE

All sizes are nominal and in inches. Special cut sizes and additional trim pieces are available upon meeting a required minimum order quantity.

Charcoal is not available in 24" x 24" relief.

All mosaics are available in corresponding field tiles.